




SX2595, SOLAR PYRANOMETER RADIATION SENSOR

The SX2595 Pyranometer is produced based thermopile principle; sensing elements are made by winding – plated thermopiles with multi contacts. Its surface is coated by black coating with high absorption rate. Hot contacts on the sensors surface, while the cold junction is located within the body, temperature difference between the hot and cold junction generates electromotive force, the thermoelectric effect is proportional to the solar radiation. In order to reduce the ambient temperature effect, temperature compensation circuit designed here to reduce the effects to products properties.

Dimensions:

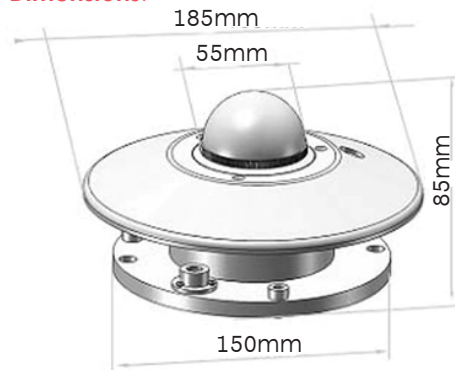

Output characteristics:

► 0-2mV

Solar radiation values (W/m²)= Voltage output value(μV)/sensitivity coefficient (μV*W⁻¹*m²),
Each product is with one sensitivity coefficient respectively (It is mentioned on the product's label).

► 0-5V

Solar radiation values (W/m²)=(V/5)*2000
(Where V is output voltage value, unit: V)

► 4-20mA

Solar radiation values (W/m²)=((I-4)/16)*2000
(Where I is output current value, unit: mA)

► RS485 MODBUS-RTU.

Mounting & maintenance:

► The sensor should be installed in the open air without any shield above the sensing surface.

- The sensor connector should be faced to the north, fix it after the horizontal position is well adjusted.
- Please check the filter cover regularly & make sure it is clean.
- Please do not remove or loose the filter cover, otherwise the accuracy will be affected.
- Please make sure the desiccant to be dry .(If the color of desiccant is changed from blue to red or white, it should be replaced, it is recommended to replace the desiccant every 6 month.)
- Protection cover is not necessary in general rainfall, but if prolonged heavy rains or hail, the protective cover is recommended to be installed. The sensitivity is recommended to be re-calibrated after two years use.

Applications:

- Agriculture ► Factory ► Farm ► Forestry ► PV power ► PV station ► Scoolyard weather station
- Solar radiation monitoring station.

MODEL	SX2595
Spectral range	300 ~ 3200nm
Supply	5V,12-24VDC
Range	0-2000W/m ²
Output	0-20mV,0-5V,4-20mA,RS485
Sensitivity	7-14μV*W ⁻¹ *m ²
Internal resistance	350Ω
Non-linearity	<±2%
Measuring angle	2TT solid angle
Response time	≤20s (99%)
Zero drift (temperature drift: 5k/h)	±5W/m ²
Stability	±2%/year
Cosine correction	≤±7%(Solar elevation angle=10°)
Temperature effect	±2%(-10°C ~ +40°C)
Operating temperature	-40°C ~ +80°C
Recalibration interval	2 years
Desiccant	Silica gel desiccant
Weight (unpacked)	2.5kg
Pack	Aluminum alloy instrument box
Dimension	Ø185x120mm
Installation bracket (optional)	Horizontal bracket or adjustable angle bracket
Ingress Protection	IP65
Storage Condition	10°C ~ 60°C@20%-90%RH